

Stable and upgraded horizontal datum for India

Sujata Dhar^{1,2,*}, Nagarajan Balasubramanian¹, Onkar Dikshit¹ and Harald Schuh^{2,3}

¹Indian Institute of Technology, Kanpur 208 016, India

²GFZ German Research Centre for Geosciences, 14473 Potsdam, Germany

³Institute of Geodesy and Geoinformation Science, Technische Universität Berlin, 10623 Berlin, Germany

A precise datum is significant as a starting or reference point for a multitude of activities like floodplain maps, property boundaries, civil surveys, precise agriculture, crustal deformation and climate studies, and works requiring consistent coordinates. A large nation like India, with almost its own tectonic plate, must have a well-defined network of horizontal datum for determining accurate and reliable 3D positioning for every user, anywhere and anytime. This article discusses the significance, methodology of realization and transformation, applications and static/dynamic coordinates for paving the way for a National Horizontal Datum in India.

Keywords: Geodetic survey, horizontal datum, reference frame, tectonic plate, three-dimensional positioning.

A set of geometrical or numerical quantities, or constants which serve as a reference for other quantities, forms a datum¹. Generally, in geodetic surveying, two types of datum are considered: horizontal datum, which approximates the shape of the Earth for determination of accurate positions, and vertical datum to which elevations are referenced^{1,2}. The specific interest of this article, horizontal datum, forms the basis for providing precise geometric positions, i.e. latitude, longitude and ellipsoidal elevation, of any point on the Earth's surface. For this, at least eight constants are needed to form a complete horizontal datum: three to specify the origin of the coordinate system, three to specify the orientation of the coordinate system, and two to specify the dimensions of the reference ellipsoid³. Such a theoretical and mathematical definition is known as a reference system and the realization of such a system to make it accessible to the users is known as a reference frame³. Datum is synonymous with the reference frame.

To simulate the Earth's surface mathematically, ellipsoids have been considered³. There are different ellipsoids based on whether they justify the surface of the whole Earth or specifically just a country¹. These were realized by tedious triangulation surveys, using traditional equipment like theodolites, set up mostly on hilltops or large towers, as they depended on line-of-sight restrictions. The advent of satellite technology, especially the Global Positioning System (GPS), made the traditional techniques

and old datums outmoded. Unlike the traditional approach of a physical survey, this modern technology has considerably eased human effort, and provided wide coverage and highly precise observations for geodetic survey networks. On the other hand, there is a strong global requirement for accurate positioning, navigation and timing as well as machine guidance and control⁴. All these can be fulfilled by Global Navigation Satellite Systems (GNSS) receivers, continuously operated on the survey control points to realize a strong horizontal datum for the region⁴. This forms a CORS (Continuously Operating Reference Stations) network⁴. The adjusted CORS network has the perfect capability to provide well-referenced, accurate and reliable spatial data, and support satellite and other related applications even in real-time. Such coordinates can also be connected to regional, e.g. Asia-Pacific Reference Frame (APREF)⁵ and global, e.g. International Terrestrial Reference Frame (ITRF)⁶, reference frames for a range of highly accurate global applications.

The National CORS network has rapidly become the most preferred system for accurate 3D positioning worldwide. Many influential nations have a well-maintained, highly accurate, accessible and consistent national horizontal datum⁷. They all have a common mission to provide precise coordinates at any time and anywhere⁸. USA has a National Spatial Reference Frame (NSRF) with CORS as its foundational component⁷. It has approximately 2000 CORS with 20+ years of data, which are run by various government, academic and private organizations^{7,9}. This defines the robust National Horizontal Datum of the USA that enables the user to determine geodetic latitude, longitude and elevation at any point within that country and its territories⁹. In Australia, to closely align the national datum to ITRF2014, refinements were made in its old datum, resulting in Geocentric Datum of Australia 2020 (GDA2020)¹⁰. The coordinates were computed using a rigorous 3D network adjustment of all available GNSS (>6 h) and terrestrial data, and the transformation parameters were derived from CORS¹⁰. The German Reference Network (DREF91) was developed in April 1991 by a GPS campaign for the first time to replace the Bessel ellipsoid (1841) as the reference surface¹¹. The network consists of 109 sites with a maximum standard deviation of 1–2 cm horizontal¹¹ and is being regularly updated. In 2016, Germany established the integrated geodetic spatial

*For correspondence. (e-mail: sujata@iitk.ac.in)

reference as a holistic approach for spatial reference¹². The DREF91 (2016) consists of 250 control stations and 350 reference stations of Satellite Positioning Service of the German State Survey (SAPOS)¹², which is the GNSS CORS network of federal states¹³. The realization includes three hierarchically adjusted networks to provide sub-centimetre accuracy¹³. These brief insights will help in assessing the situation in India.

The status of India's horizontal datum has not been considered holistically. This article discusses major steps to initiate a stable and upgraded National Horizontal Datum (NHD) in India. Here stability refers to the ability of the reference frame to maintain its consistency over time³. However, this geodetic infrastructure is a shared national asset required to maintain international leadership in economic and scientific committees, support national security³ and satisfy all other crucial national needs.

Present status of the National Horizontal Datum in India

With the limited resources available to the user community, the following is the known status of NHD in India. Early in the 19th century, the Great Trigonometrical Survey (GTS) was commenced¹⁴ as a basis for mapping the general topography of India¹⁵. Almost the whole country was covered by triangulation¹⁴. Due to the limitation of instrumentation techniques at that time, the accuracy achieved was within a few hundred metres¹⁵. In the past, the Indian geodetic datum was based on the Everest ellipsoid; a locally fit ellipsoid developed in the 1830s from a combination of several triangulation networks^{16,17}. This was the least satisfactory of all the major datums¹⁷, as it could not be extended too far from the origin¹. Also, with the advent of the satellite era, the old geodetic control of India was inadequate for most of the geodetic, geodynamic, geophysical and defence applications¹⁵, as this required global datum. At that time, WGS-84 was widely used by many countries as the datum for mapping^{15,18}. Therefore, in 2005, a transformation campaign was conducted to determine the transformation from Everest to WGS-84 (ref. 16). This method was a quick solution to the insufficient Indian datum problem and for acquiring improvised coordinates without much hassle. In this transformation campaign, 300 GTS stations were selected¹⁶ and 72 h of static GPS observations were made to compute their WGS-84 coordinates. Then with the coordinates available in both systems, i.e. WGS-84 and Everest, transformation parameters were calculated and distributed to the user community¹⁶. These transformation coordinates were accurate up to ~3 m (ref. 16). Therefore, it was decided that the accuracy was good enough for 1 : 50,000 scale maps¹⁶. As emphasized earlier, this method was not the best to get an improved Indian datum, but a quick fix for carrying out geocentric applications. As the chosen control points were the then-existing GTS stations, their distribution

was not uniform for the whole country. Moreover, ITRF had started becoming more recognized than WGS-84 (refs 6, 19). So, to introduce a re-defined version of the Indian geodetic datum, a new realization campaign was brought in by the Survey of India (SoI) in 2005, simultaneously with the transformation campaign. It started with phase I, in which around 300 new GPS (first-order) control sites were established all around India with 200–300 km distance between them. Unlike the GTS stations of the previous campaign, these new chosen benchmarks were uniformly distributed and selected by an extensive reconnaissance survey. The permanent survey monuments were established on these sites using forced centring devices to mark the exact reference point. Static GNSS observations for 72 h were made on these first-order control points and fixed precise coordinates were determined. Three IGS stations (DGAR, KIT3, LHAZ) were considered to fix the independent coordinates of each station in ITRF05. Then, phase-II was planned to densify the geodetic control network with around 2400 stations (second-order control) with 30–40 km distance between them. However, the development of the second phase did not go as planned. Even the already established control network was not updated and maintained over a long period to serve the purpose of proper horizontal datum for India. According to ground reports, many of these survey control monuments were destroyed during the various developmental activities and vandalism due to lack of awareness. The adjusted network was not readjusted to take into account the destroyed and damaged control stations and their data. Hence, the Indian geodetic datum failed to achieve its purpose and precise coordinates were not available for any applications requiring sub-centimetre accuracy. This adversely affected the user community in India and many scientific developments in the country¹⁵. SoI is trying to combat this situation with infrastructural plans, and this article will certainly assist in the endeavour by highlighting significant steps and providing some beneficial recommendations.

Modern-day realization of the National Horizontal Datum

As a modern-day realization of NHD, CORS should fulfil three significant goals – accessibility (equipment should be fast, inexpensive, reliable and improving), accuracy (resistance to distance-dependent errors and benchmark instability), and consistency (eliminating systematic errors and aligning with the latest global reference frames)¹⁹. Let us discuss the sequential steps required to realize NHD through the GNSS CORS network in India.

Network procedure

The National Geodetic Network will comprise three hierarchical levels or tiers^{4,20}, such as the first-, second- and

third-order control points. The first-order network will be an ultra-high accuracy CORS network equipped with geodetic quality receivers that can track all broadcasted global/regional navigation satellites, stable antenna monuments and IGS site compliant features^{4,20}. These points should be well distributed across the country² and its coordinates must support the definition of a global reference frame^{4,20}. The second-order nationwide network will densify the latter and will be adjusted under the condition that the three-dimensional coordinates of all the first-order control points are fixed². They will be equipped with similar features as the first-order CORS, but will be normally operated and maintained by national or State Government agencies^{4,20}. The third-order CORS points will be equipped with basic interoperable receivers⁴, for further densification of the second-order network, within 15–20 km or less point density¹³. The above three network levels are hierarchically adjusted¹³. The final outcome will provide precise geographical coordinates (latitudes and longitudes) and ellipsoidal heights at any point in the country with sub-centimetre accuracy.

Set-up of CORS infrastructure

Here we discuss some key aspects of establishing the CORS infrastructure. The primary instrument will be a continuously observing dual-frequency GNSS receiver, including Indian Regional Navigation Satellite System (IRNSS) signal-receiving capability. The infrastructural guidelines should comply with the IGS standards adapted to suit the Indian conditions²¹. The site conditions should have minimal impact on the measurement³. The receivers should operate to guarantee the efficiency of the network and the long-term quality of its products^{20,21}. The antennas should be stable and comply with the best multipath reducing measures²¹. Tough security and safety measures should be in place to increase the longevity of the antennas. Lastly, the CORS receivers should cover the whole Indian subcontinent evenly and be densely distributed to serve any user with the best possible accuracy.

GNSS data processing and analysis facilities

Data centres (DCs) should be established with state-of-the-art facilities to receive observational data from the permanent CORS network in India. Good-quality checking routines like Unix/Hatanaka compression/decompression, TEQC quality, etc., should be incorporated to avoid storing poor data²². All the stored quality observations should comply with the common guidelines of the data format. The NHD stations will upload receiver-independent exchange (RINEX) data in the DCs²³. They will be analysed in the analysis centres (ACs). The ACs acquire quality data to generate precise station positions and velocities of datum points²³. Also, the ACs should provide weekly/daily output for qualitative analysis. Graphical visualiza-

tion tools, e.g. residual plots, correlation coefficient plots, etc., should be used for quality control of the recorded data²². A few local ACs should be set-up to introduce redundancy in the results to eliminate any systematic errors from a single solution. To fulfil this mission, a good combination tools and proper weighing of individual solutions are imperative.

Network adjustment

The quality of a geodetic network depends on the precision³ and reliability of the coordinates²⁴. In an ideal situation with no errors, this step would not be necessary. However, no measurement is free of errors; hence, adjustment is necessary to distribute these errors in the best possible way. The least-squares technique provides a dependable means for determining the best possible coordinates of survey control points and their uncertainties from a redundant set of measurements²⁵.

According to Lee *et al.*², there are essentially two classes of network adjustment for geodetic surveying.

Minimally constrained adjustment: To assess internal observations independent of external control, minimally constrained adjustment is used. In a geodetic network, this adjustment makes the coordinates of only one station fixed, i.e. cannot be adjusted in position and orientation. In this way, no errors, except those due to the current observations, will be accounted for in the network. This will provide internal precision of the derived coordinates in the survey and allow to check for outlier existence and remove them. It is also used to validate measurements and readjust a-priori weights.

Overly constrained adjustment: After removing of the outliers in the previous adjustment, fully or overly constrained adjustment is performed. This is carried out by fixing at least three stations in order to define the datum, orientation and scale of the network. Therefore, all GNSS-CORS of the network are held fixed. Likewise, for adjusting the second-order network for precise coordinates, an over-constrained adjustment is carried out with the first-order control points held fixed. This adjustment should be tested to verify that the imposed constraints do not result in measurement failure²⁵.

After the network is adjusted, a statistical measure of how well the adjustment results match the expected outcome of the observations is carried out. This is given by the a-posteriori variance factor. Once the adjusted results pass the a posteriori test, the reference network of NHD is suitable for use.

Maintenance and upgradation of the network

The rigorous realization of the datum based on CORS network requires constant monitoring of the coordinates and

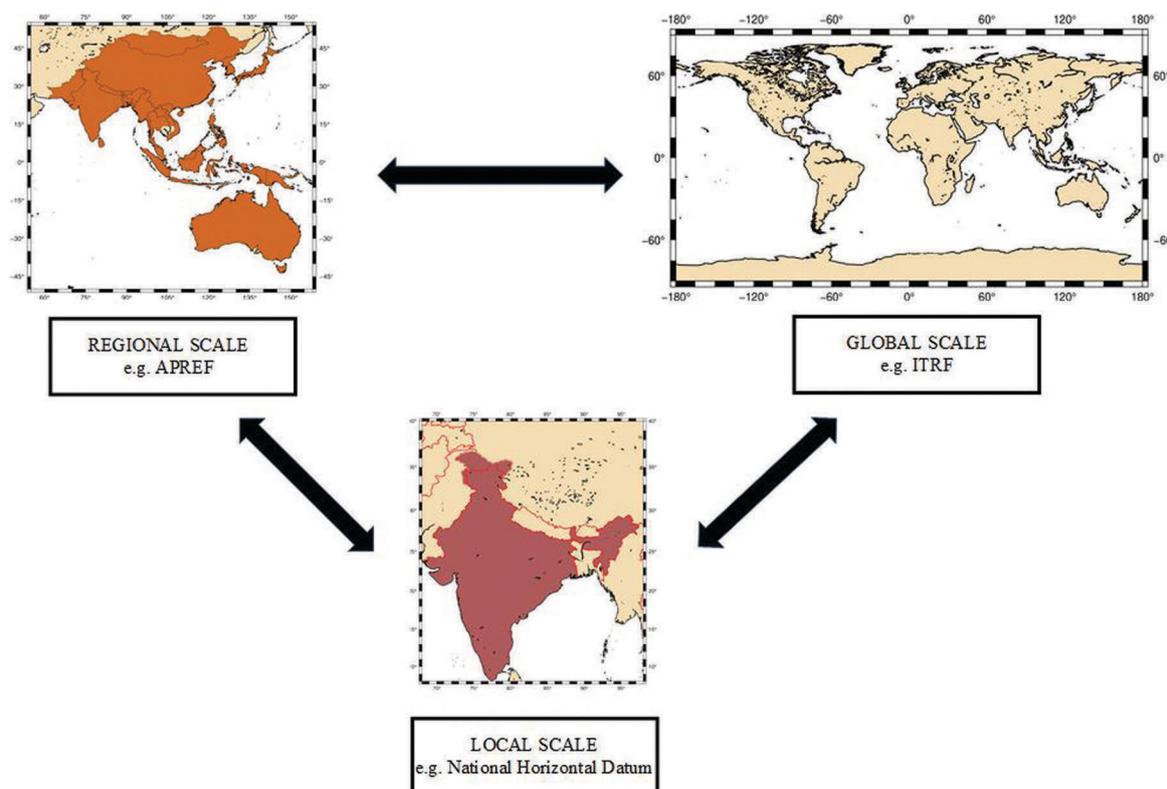


Figure 1. Transformation levels between different terrestrial reference frames.

velocities of the stations defining the datum. These defining stations must be maintained over the years. Each station on the ground is important for realizing the datum, and even the smallest change in any of the stations will cause a change in the adjusted network of the datum and have subsequent effects in providing precise coordinates to the users³.

Upgradation of the network is important from time to time to bring in improved methodologies for better functioning and quality of the products. The periodic upgrades are necessary to take care of the following.

- (i) Expanding to every nook and corner of the country by installing new stations in the area gaps of the previous network⁷.
- (ii) Modernizing with technological advancements.
- (iii) Ensuring higher accuracy of the datum.
- (iv) To be in sync with the improved and modified global standards, e.g. latest ITRF realization.
- (v) Incorporating all the dynamic changes of the Indian Plate in the periodic updates.

Transformation to global/regional reference frames

It is necessary to determine transformation parameters from the local reference frames to those of global and re-

gional frames in order to study global and regional phenomena respectively^{26,27}. Then, the observations from the same geodetic stations can be used for local, regional as well as global applications, as required. The most commonly used methodology is to convert coordinates from one system to another, deploying a least-squares principle and known fundamental points, whose coordinates are known on both systems^{16,28}. Therefore, more common control points in NHD with those of regional and global systems are required for good transformation²⁷. India has five IGS registered stations (IISC, HYDE, LCK3, LCK4, JDPR) which are a part of ITRF realization and one APREF registered station (IITK)²⁹. A country like Japan, which is about ten times smaller than India, has 14 IGS stations²⁹ and ten APREF stations⁵. This indicates that India should consider investing in modern geodetic infrastructure at the same pace as other countries. Figure 1 depicts the level of transformation with respect to NHD.

International Terrestrial Reference System (ITRS) is a global spatial reference system co-rotating with the Earth in its diurnal motion in space^{4,6}. It is geocentric and time-dependent^{6,27}, i.e. its coordinates change with a linear function of time due to tectonic motion²⁸. It is realized by four space geodetic techniques⁶ – Very Long Baseline Interferometry (VLBI), Satellite Laser Ranging (SLR), Doppler Orbitography and Radiopositioning Integrated by Satellite (DORIS) and GNSS^{3,4}. Therefore, adopting other techniques in India along with CORS will help align NHD

more closely with ITRF. The regional frame, APREF, is realized from the integration of the well-sampled velocity fields of the Asia and Pacific regions from regional and national permanent GNSS networks⁵. Suppose here we consider Indian Reference Frame (INREF) as our NHD, we can see the transformation approach between ITRF and INREF. On similar lines, the transformation of INREF to APREF or any other terrestrial reference frame will be considered.

The 3D similarity transformation connects two frames with different geodetic datums of different origins, orientation around three axes and scale^{6,11}. This leads to the basic equation of the seven-parameter (one scale, three translations and three rotations) Helmert transformation as^{6,28}

$$X_2 = X_1 + T + D \cdot R \cdot X_1, \quad (1)$$

where D is the scale factor.

The cartesian coordinates are in X matrix.

The subscripts 2 and 1 denote the two frames, with 2 being the desired output and 1 being the input or the start frame.

$$X_1 = \begin{bmatrix} X_1 \\ Y_1 \\ Z_1 \end{bmatrix}, X_2 = \begin{bmatrix} X_2 \\ Y_2 \\ Z_2 \end{bmatrix}. \quad (2)$$

T is the translation vector of the origin along the X , Y , Z axes.

$$T = \begin{bmatrix} T_x \\ T_y \\ T_z \end{bmatrix}. \quad (3)$$

R is the rotation matrix around the X , Y , Z axes, with angles α , β , γ (counter-clockwise in RHS) respectively. So,

$$R = R_z(\gamma) \cdot R_y(\beta) \cdot R_x(\alpha). \quad (4)$$

$$R_x(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \alpha & \sin \alpha \\ 0 & -\sin \alpha & \cos \alpha \end{bmatrix}$$

$$R_y(\beta) = \begin{bmatrix} \cos \beta & 0 & -\sin \beta \\ 0 & 1 & 0 \\ \sin \beta & 0 & \cos \beta \end{bmatrix}. \quad (5)$$

$$R_z(\gamma) = \begin{bmatrix} \cos \gamma & \sin \gamma & 0 \\ -\sin \gamma & \cos \gamma & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Therefore, the general model of transformation from one reference frame to another will be^{27,30}

$$\begin{bmatrix} X_2 \\ Y_2 \\ Z_2 \end{bmatrix} = \begin{bmatrix} X_1 \\ Y_1 \\ Z_1 \end{bmatrix} + \begin{bmatrix} T_x \\ T_y \\ T_z \end{bmatrix}_{1,2} + \begin{bmatrix} D_{1,2} & -R_{z(1,2)} & R_{y(1,2)} \\ R_{z(1,2)} & D_{1,2} & -R_{x(1,2)} \\ -R_{y(1,2)} & R_{x(1,2)} & D_{1,2} \end{bmatrix} \begin{bmatrix} X_1 \\ Y_1 \\ Z_1 \end{bmatrix}. \quad (6)$$

Now, specifically discussing the transformation approach from ITRF kk (e.g. ITRF14) to INREF nn (e.g. INREF21)²⁷, both are in different epochs, i.e. kk and nn . Input data will be the ITRF kk and INREF nn station coordinates and the velocities of common GNSS control stations at the reference epoch, t_r . However, the transformations will be computed at the campaign epoch, t_c . For ease of writing the equations, X^I and X^{IN} denote the cartesian coordinate matrix in ITRF and INREF respectively. The dot above X in the equations (7) and (8) below denotes their velocities.

According to Boucher and Altamimi³⁰, the following transformation approach can be applied³⁰:

- (i) The ITRF coordinates of the common control stations in recent ITRF kk will be transformed from t_r to t_c using eq. (7).

$$X_{kk}^I(t_c) = X_{kk}^I(t_r) + \dot{X}_{kk}^I \cdot (t_c - t_r). \quad (7)$$

- (ii) Now, ITRF kk at t_c will be transformed to ITRF nn using the latest IERS published values of seven transformation parameters, using eq. (6).
- (iii) Then, eq. (8) will be used to transform from ITRF nn to INREF nn .

$$X^{IN}(t_c) = X_{nn}^I(t_c) + T_{nn} + \dot{R}_{nn} \cdot X_{nn}^I(t_c) \cdot (t_c - nn). \quad (8)$$

The above three-step procedure can be performed in one step using 14-parameter transformation between ITRF kk and INREF nn (refs 27, 31). The transformation has to be flawless for high-precision applications. Therefore, assessing the accuracy and reliability of the resultant transformation parameters is important. This can be done on some chosen checkpoints as an independent check by comparing actual and transformed positions²⁸. The transformation parameters have to be standard, readily available and easily accessible to avoid any confusion among the user community.

Static and dynamic coordinates

Static and dynamic coordinates have their own significance with respect to different applications. Traditionally, the static reference system was used with fixed benchmarks on the ground as control³². The coordinates of such control points are fixed at the reference epoch and are time-independent³²⁻³⁴. Such unaltered coordinates are

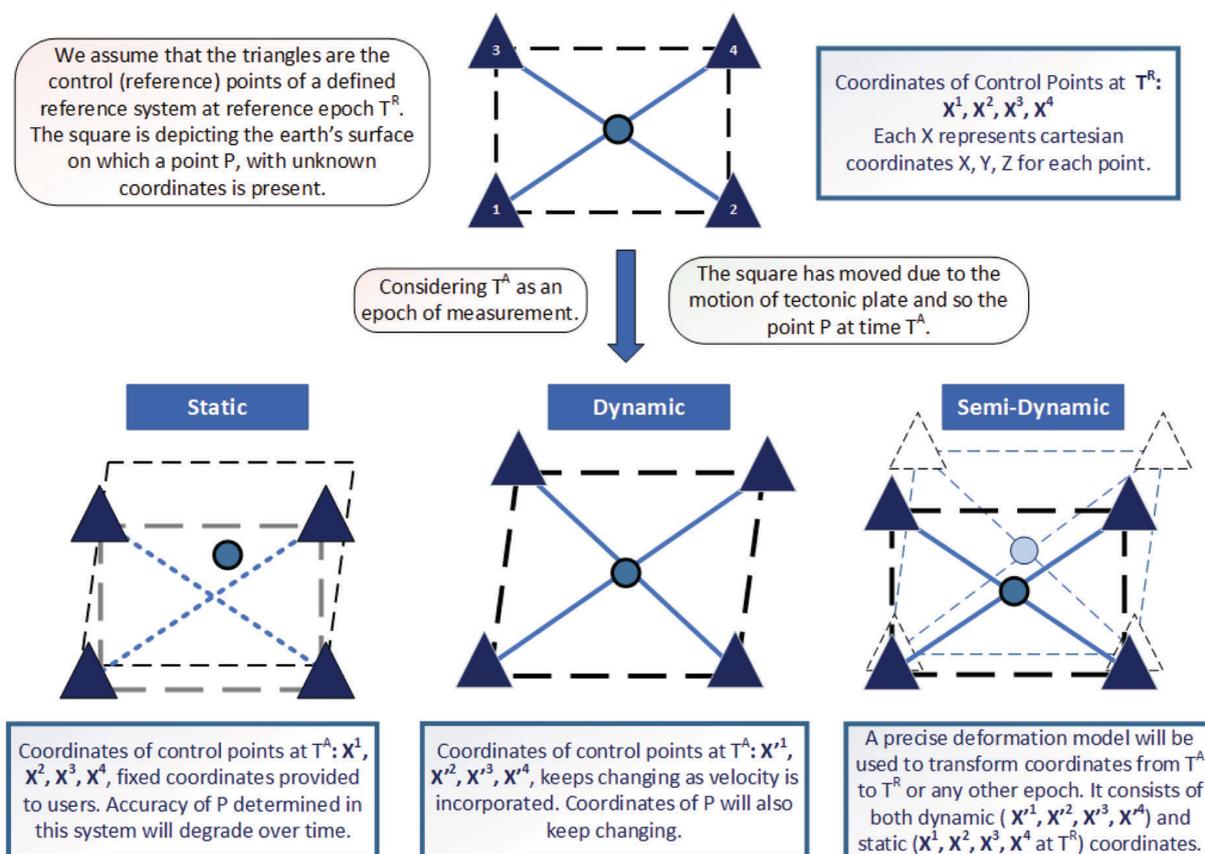


Figure 2. Representation of three types of geodetic terrestrial reference frames.

useful for administrative purposes like mapping, cadastre, and practical applications that can ignore tectonic motion³⁴. In reality, the Earth's surface is continuously moving due to plate tectonics²⁶ and local deformation events like earthquakes, landslides, etc.^{32,33}. This results in the deterioration of the static coordinates over time. A major disparity occurs due to the fact that the GNSS orbits are calculated with respect to ITRF⁶. Thus, the GNSS conferred positions will deviate drastically from those of the static coordinates. Over time, when the degraded accuracy of the static coordinates falls below the GNSS accuracy and user expectations, it is time for renewal^{32,33}. Upgrading the static reference frame is laborious and expensive³², and hence cannot be done frequently. To fulfil the sub-centimetre accuracy needs of real-time applications and to study the Earth system, time-dependent coordinates are necessary. This is provided by the dynamic reference system²⁷, which is based on the global ITRS coordinates^{32,34}. This system is complex and confusing for many users, as the coordinates are continuously changing with no proper epoch^{33,34}. This renders it unsuitable for many practical applications^{32,33}. For exploiting the advantages of these two geodetic reference systems, the semi-dynamic (semi-kinematic) reference system is widely used^{32,35}. This is based on the CORS control network,

which provides time-dependent coordinates and determines the national deformation model incorporating local movements^{33,34}. The semi-dynamic system uses this deformation model to transform dynamic coordinates consistently to a fixed reference epoch^{32,33,35}. It provides quasi-static coordinates with reference to a specific epoch, which does not vary until they exceed a certain critical level³⁴ so that non-geodetics can avoid the complexities of the dynamics. Figure 2 gives a pictorial representation of the concept discussed here. Countries like New Zealand and Australia, where horizontal plate motions are up to 5–7 cm/yr follow the semi-dynamic reference system^{8,10,35}. Therefore, this approach is highly recommended for a tectonically active country like India, which is subjected to plate movements up to 5–6 cm/yr and other intra-plate activities^{34,36}. This will avoid the expenses updating the static datum regularly without compromising of the accuracy of the coordinates^{32,33}.

Benefits

The burning question nowadays is ‘Where on Earth am I?’ From a pilot to a geodesist, this question is of utmost importance and accordingly requires different precision

in positions³. Therefore, the range of accuracy of the required coordinates varies from metres to millimetres.

The multifarious activities of huge economic, social and environmental impacts now depend directly or indirectly on the precise positioning data^{19,37,38}. The following are some highlights from the wide range of NHD applications.

Societal applications

1. It will provide a precise reference for surveying that is significant for many engineering works like construction of roads, rails, canals, pipelines, powerlines, communication infrastructures, etc.^{4,39}.

2. The global reference coordinates are not modified to accommodate changes from local deformations. At that time, NHD is updated for the changed positions and gives actual coordinates in the affected nation. For example, 'Japan and Chile could not use the ITRF after the 2010 earthquakes'³⁹.

3. It will assist in providing disaster relief efforts in emergency healthcare and delivering of basic needs like food, water or clothes to the exact locations of disaster-hit areas in the country^{4,19}. Such inaccessible locations can be reached by air ambulances, drones or helicopters.

4. It will help manage land resources by improving the cadastral mapping³⁹ and providing 'definitive' national and various administrative boundaries⁴¹.

5. With the growing purchasing power, smartphones account for almost 80% of the global installed base of satellite positioning devices³⁸ and most applications (apps) use location data for their services⁷. NHD will improve localized positioning data to impart better niche services.

6. More automated vehicles, Unmanned Aerial Vehicles (UAVs), drones and augmented reality platforms are the futuristic goals of society³⁸. These will depend solely on reliable and precise positioning services.

7. It can be used to implement the railway network across India with sub-centimetre positional accuracy⁴¹ and can also offer enhanced safety at a lower cost (i.e. railway signalling)³⁸.

Economic applications

1. Though India's new geospatial policy has democratized mapping, accurate maps can only be developed from good metrological reference, provided by stable static coordinates of NHD⁴².

2. It will help map waterbodies around India and become the primary source of PNT (position, navigation, timing) information in them^{37,38}. This will certainly be useful for fishermen, recreational boats, freight ships and addressing any distress call.

3. This service will enable precise agriculture by providing good positional accuracy to drones or pesticide-spraying UAVs³⁸. It will be vital to the economy as 'agriculture

and related industries account for 17% of India's GDP and feeds almost 50% of its workforce'⁴⁰.

4. The dynamic coordinates of NHD can be used for Indian satellite orbit determination by tracking localized changes in the control and monitoring stations⁸.

5. The aviation market will rely completely on such precise positioning services for the operation and safety of the increasing number of domestic aircraft³⁸.

6. This service will improve remote sensing by accurate positioning of aerial mapping aircraft^{9,19}. It improves the reliability of photogrammetric restitution of large areas, specifically remote and inaccessible terrain⁹.

7. The above concept can also be used to assist technologies like LIDAR, InSAR, sonar, etc. in mapping terrains with digital cameras⁹.

Environmental applications

1. The variation of vertical crustal velocities at the NHD CORS sites near tide-gauge stations will be used to relate local sea-level changes to global ITRF⁹. This will be beneficial for monitoring ~7500 km of the Indian coastline.

2. It will assist in geodynamical studies by monitoring local deformations and intra/inter Indian plate movements, which are mostly precursors of seismic activity, volcanic eruptions and local subsidence³⁹.

3. With the analysis of data from ground-based CORS receivers, tropospheric parameters can be obtained as a part of the estimation^{9,41}, which will support meteorological research in the country and improve weather forecast³.

4. Local ionospheric models can be developed to mitigate local ionospheric effects using well-suited correction models in space-based geodetic observations⁹.

5. Specifically, this will help improve predictions of natural disasters like tsunamis, cyclones, earthquakes, flooding, etc.⁷. Moreover, it will help examine their size and intensity, impact area, and development of early warning systems^{3,4} and GIS-based evacuation routes for minimizing crowding and panic.

Conclusion

NHD forms the pillar of georeferencing in India and its applications have been emphasized here (Figure 3). The concept of NHD is not new to India, and there have been past realizations of the Indian datum. However, science in this respect has taken a big leap globally, but India's progress in this sector is substandard. We have dependent more on the global reference frame than our local frame for indigenous applications. Establishing a well-defined network alone for better NHD is not sufficient. The defining network station coordinates must be adjusted and maintained diligently, transformation parameters have to be determined and repetitive epochal campaigns should be conducted for exceptional updates. Shortcomings



Figure 3. Applications of the Indian CORS infrastructure of the National Horizontal Datum.

in any of these integrated processes will affect the precise positioning services, vital defence and scientific studies in India. Moreover, an accuracy of ~ 2 cm in the GNSS-derived heights of the CORS network will help in developing better vertical control for the whole country^{1,4,10,19}.

From the geodynamic point of view, India is in a unique position with its own tectonic plate. So, it becomes much more important to have our own spatial reference frame to monitor the changes in coordinates locally. Moreover, it can be geographically and temporally interpolated or extrapolated whenever and wherever required within the Indian subcontinent, according to local needs. Though most of the key points have already been discussed above, the following are some crucial points from the user's perspective for a better NHD.

- It should be consistent in all parts of the Indian subcontinent⁷.
- The static coordinates must not change frequently³².
- The dynamic coordinates should be closely aligned with the global system so that we can have better coordinates for many global applications like airport obstacles, freight ships, etc.
- Accessible transformation tools with contemporary programming and consistent transformation parameters must be provided^{7,19}.
- There must be an increase in the number of common points in global, regional and national reference frames, i.e. IGS/ITRF, APREF and NHD respectively, across the country to get good transformation²⁸.
- Co-location with other existing space geodetic infrastructure, i.e. VLBI, SLR and DORIS of India, is essential to strengthening the link between the national frame and ITRF^{7,19}.

- A formal publication of NHD is required, which can be accessed by the users and the scientific community.
- There must be awareness among the people about the significance of these geodetic monuments of NHD and stricter laws must be implemented to protect them. This initiative will preserve these structures from destruction and vandalism.
- A competent body with a large workforce should be chosen to establish and monitor the status of the control monuments and replace/repair their instrumentation in case of failure.
- Another proficient body should help coordinate the NHD network, and act as a coordinator between station operators, DCs and ACs, and maintain the product and information system²³.
- India should develop its own software for quality checks, processing of CORS data and monitoring the geodynamic activities of the Indian Plate exclusively.
- The necessary periodic campaigns must be conducted for NHD upgradation and incorporation of changes.
- Regular training and tutorials must be provided to the user community.

The above points reveal that an integrated approach from various competent organizations is predominant for the proper functioning of the NHD service. With this, we can aspire for a better future for NHD in India.

1. DMA, Geodesy for the Layman. DMA Technical Report 80-003, The Defense Mapping Agency, 1983, pp. 29–39.
2. Lee, Y. J., Lee, H. K. and Jung, G. H., Realization of New Korean Horizontal Geodetic Datum: GPS observation and network adjustment. In Proceedings of the Korean Institute of Navigation and Port Research Conference, Seoul, Korea, 2006, pp. 529–534.

3. National Research Council, *Precise Geodetic Infrastructure: National Requirements for a Shared Resource*, National Academies Press, Washington, DC, USA, 2010.
4. Schweiger, V., Lilje, M. and Sarib, R., GNSS CORS – reference frames and services. In Proceedings of the Seventh FIG Regional Conference, Hanoi, Vietnam, October 2009.
5. Hu, G., Jia, M. and Dawson, J., Report on the Asia Pacific Reference Frame (APREF) Project. Geoscience Australia, Record 2019/17, 2019.
6. Petit, G. and Luzum, B., IERS Conventions (2010), Verlag des Bundesamts für Kartographie und Geodäsie. Frankfurt am Main, 2010.
7. Caccamise II, J. D., Positioning a nation for the future: modernizing the United States National Spatial Reference System. In SIRGAS 25 Year Symposium, Aguascalientes, Mexico, October 2018.
8. Haasdyk, J., Donnelly, N., Harrison, C., Rizos, C., Roberts, C. and Stanaway, R., Options for modernising the Geocentric Datum of Australia. In Proceedings of Research@Locate, 2014, vol. 14, pp. 72–85.
9. Snay, R. A. and Soler, T., Continuously operating reference station CORS: history, applications, and future enhancements. *J. Survey. Eng.*, 2008, **134**(4).
10. Intergovernmental Committee on Surveying and Mapping (ICSM), Geocentric Datum of Australia 2020 Technical Manual. Commonwealth of Australia (Geoscience Australia), Australia, 2018, vol. 1.2, pp. 1–77.
11. Cai, J., The systematic analysis of the transformation between the German geodetic reference system (DHDN, DHHN) and the ETRF system (DTREF91). *Earth Planets Space*, 2000, **52**, 947–952.
12. Dostal, J., Geodetic activities in Germany. In PosKEN Workshop, Bruges, Belgium, October 2018.
13. Schwieger, V., An example of terrestrial reference frame realisation, Germany. In IAG/FIG Commission 5/ICG Technical Seminar, Rome, Italy, May 2012.
14. Raman, A. and Balakrishnan, V., The spark that fired the Great Trigonometrical Survey of India: the triangulation survey made between Fort St. George (13°08'N) and Mangalore (12°91'N) by William Lambton in the early 1800s. *Curr. Sci.*, 2020, **118**(1), 147–154.
15. Agrawal, N. K., Geodetic Infrastructure of India. In Website of Coordinates, 2005; <https://mycoordinates.org/geodetic-infrastructure-in-india/all/1/> (accessed on 13 September 2021).
16. Singh, S. K., Coordinate transformation between Everest and WGS84 datum – a parametric approach. Geodetic and Research Branch, Survey of India, Dehradun, 2002.
17. Mueller, I. I., *Spherical and Practical Astronomy: As Applied to Geodesy*, F. Ungar Pub. Co, New York, USA, 1969.
18. Kumar, M., World geodetic system 1984: a modern and accurate global reference frame. *Mar. Geodesy*, 1988, **12**(2), 117–126; doi: 10.1080/15210608809379580.
19. Carlson, E. E., How to transition to the United States 2022 National Coordinate System without getting left behind. In Workshop on Applications of Global Navigation Satellite System, United Nations Office for Outer Space Affairs, Fiji, June 2019.
20. Rizos, C., Multi-constellation GNSS/RNSS from the perspective of high accuracy users in Australia. *J. Spat. Sci.*, 2008, **53**(2), 29–63.
21. International GNSS Service (IGS), IGS site guidelines, July 2015; https://kb.igs.org/hc/enus/article_attachments/202277487/IGS_Site_Guidelines_July_2015.pdf.
22. Bruyninx, C., Roosbeek, F., Habrich, H., Weber, G., Kenyeres, A. and Stangl, G., The EUREF Permanent Network Report, Royal Observatory, Belgium, 2000.
23. Bruyninx, C., Legrand, J., Fabian, A. and Pottiaux, E., GNSS metadata and data validation in the EUREF Permanent Network. *GPS Solut.*, 2019, **23**, 106.
24. van Mierlo, J., Difficulties in defining the quality of geodetic networks. In *Survey Control Networks*, Schriftenr. Fils. Stud. Verm. HS Bw, 1982, vol. 7, pp. 259–274.
25. Intergovernmental Committee on Surveying and Mapping (ICSM), Guideline for the adjustment and evaluation of survey control: special publication 1, Commonwealth of Australia (Geoscience Australia), 2014, vol. 2.1.
26. Altamimi, Z. *et al.*, The terrestrial reference frame and the dynamic Earth. *Eos, Trans., AGU*, 2001, **82**(25), 273–279.
27. Bosy, J., Global, regional and national geodetic reference frames for geodesy and geodynamics. *Pure Appl. Geophys.*, 2014, **171**, 783–808.
28. Thi, H. P., Quoc, D. N., Hoai, T. T. T., The, H. P. and Thi, N. L., Determination of the relationship between Vietnam coordinate reference system (VN-2000) and ITRS, WGS84 and PZ-90. In E3S Web of Conferences, EDP Sciences 2019, vol. 94, p. 03014.
29. Interactive map of ITRF2014 network; <https://www.iers.org/IERS/EN/DataProducts/ITRF/map/itrfmap.html> (accessed on 3 November 2021).
30. Boucher, C. and Altamimi, Z., Memo: specifications for reference frame fixing in the analysis of a EUREF GPS campaign. ETRS 89. IGN, 2011, version 8.
31. Dawson, J. and Woods, A., ITRF to GDA94 coordinate transformations. *J. Appl. Geodesy*, 2010, **4**(4), 189–199.
32. Poutanen, M. and Hakli, P., Future of National Reference Frames – from static to kinematic. *Geodesy Cartogr., Pol. Acad. Sci.*, 2018, **67**(1), 117–129.
33. Blöck, G. and Stanaway, R., Four dimensional deformation models for terrestrial reference frames. In IAG/FIG Commission 5/ICG Technical Seminar, Rome, Italy, May 2012.
34. Azhari, M. *et al.*, Semi-kinematic geodetic reference frame based on the ITRF2014 for Malaysia. *J. Geod. Sci.*, 2020, **10**, 91–109.
35. Blick, G. and Grant, D., The implementation of a semi-dynamic datum in New Zealand – ten years on. In Proceedings of FIG Congress 2010, Sydney, Australia, April 2010.
36. Simons, W. J. *et al.*, A decade of GPS in Southeast Asia: resolving Sundaland motion and boundaries. *J. Geophys. Res.: Solid Earth*, 2007, **112**(B6).
37. European Global Navigation Satellite Systems Agency, GSA GNSS Market Report. Publications Office of the European Union, Luxembourg, 2019, issue 6.
38. European Global Navigation Satellite Systems Agency, GNSS Market Report. Publications Office of the European Union, Luxembourg, 2017, issue 5.
39. Federation of Indian Chambers of Commerce and Industry (FICCI), Geospatial technologies in India: select success stories, 2017.
40. Drewes, H., Frequent epoch reference frames instead of instant station positions and constant velocities. In SIRGAS Symposium, Mendoza, Argentina, November 2017.
41. Bruyninx, C. *et al.*, The European Reference Frame: maintenance and products. In *Geodetic Reference Frames*, International Association of Geodesy Symposia, Springer, Berlin, 2009, vol. 134, pp. 131–136.
42. DST, Draft National Geospatial Policy, Department of Science and Technology, Government of India, New Delhi, 2021.

Received 24 September 2021; revised accepted 10 April 2022

doi: 10.18520/cs/v123/i1/43-51