

A Novel Method for Energy Effectiveness By Employing Adaptive Node Coverage Region

Dr. A. Rengarajan¹, S. Rajasekaran¹, Hemanth Siramdasu¹, N. Insozhan¹

¹Department of Computer Science and Engineering, Veltech Multitech Engineering College, Chennai, Tamilnadu, India; rengu_rajana@yahoo.com, rajasekaran009@gmail.com, hemanth204@gmail.com, insozhan@veltechmultitech.org

Abstract

Objectives: Tasks are conducted depending upon the cooperation of the nodes in generic ad hoc network. This paper examines the efficiency of the node cooperation incentives which are delivered through the schemes, by ANC approach. **Methods:** The current proposed scheme diminishes the traditional transmission range by adapting the dissimilarities radio range in real time, by comparing the node distance i.e., greater than acceptable threshold gathering their node coverage area by sending the Hello packets among the nodes. During such thing it has been measured the resilience metric to find out what extend the path protects a multiple cast tree to specific protection against single link failure propose method to strengthen the fast reroute for repair the current consistency nodes and to initiate the update procedure of the transmission range, by this ANC model, one can examine the collaboration incentives successful packet delivered through these dual schemes through no cooperation incentive approach. **Findings:** The speculative and simulation outcomes display the advantage of the united system over the discrete system and its metrics like battery life, distance, position and mobility is done based on the factors such as node density, coverage area, contention index, and current node degree of the nodes in the networks. **Applications/Improvements:** The problem of transmission range adjustment in a multi-hop wireless network context is discussed with an optimized technique and also evaluated our approach in the case of a uniform node distribution and findings confirm the previous results. An analytical model that provides an estimation of the transmission area too designed.

Keywords: Transmission range, Power optimization, Topology formation, Ad hoc networks

1. Introduction

In order to increase the performance of the succeeding wireless ad hoc network the architectures, protocols must be designed in such a way that it is less power consuming and increases the operation lifetime in all devices. Communication is proceeding through transmission power control which influences the operational lifetime of the devices in many ways. Let us assume for devices like a computer attached to wireless LAN radio, here the transmission power is very less, hence it does not influences the operational lifetime of the devices. Where as in devices like cellular phones, PDAS, etc. the transmission

power plays an important path in it reducing it will automatically increases the lifetime of operation for the device and also complement the overall using experience. It is a taking process to design a routing protocol for wireless ad hoc network. The two scarce resources in the network involve bandwidth and power resources. The bandwidth and power availability decreases in the user's side during the process of topology sign align. In addition to this topology changes also play an important role in the power efficiency of the network. Hence a proper routing protocol should be involved to maintain and respond to these adjustments using minimum signaling and also by considering the power reserves present in network¹.

*Author for correspondence

A PARO is proposed in order to overcome the above mentioned barrier in the wireless ad hoc network. Where the each node is present inside a range known as transmission range, among each other. In order to reduce the transmission power a packet forwarding approach is used which allows the election of redirectors by neighboring nodes. This approach increase the operation lifetime of network devices based on different radio ranges of transmission in a group. This process is starting to invoke a lot of attention. Normally the power consumption is in a larger scale during transmission compared to reception a listening phase. It proposes a system which adjusts the transmission power depending upon the packets. To increase the number of redirection nodes between the source and destination path this will be followed by reducing the transmission power. This is a total opposite approach when compared with MANET. This uses the process of decreasing the number of hops between the initial nodes to final node. A general approach in both the process is that they use various broadcasting flooding protocols. In order to improve the performance by reducing the signaling overload and to decrease the traffic in network wide area routing protocols are used. In contrast to PARO other data transfer mechanisms use minimum hop routes, which require more transmission power where as PARO uses intermediate nodes. Either a target amount of signaling packets are forwarded on there in an issue in disordering the “maximum” route with number of intermediate nodes these issues prevent the discovery of optimal power house route in MANET. Hence a new power aware routing approach must be developed to solve this problem. Data transmission and route discovery are two main factors that must be considered while designing the new power efficient protocol. PARO implements node to node routing approach which will help to improve the efficiency of the network and also discover the power aware node route PARO is applicable in all angles. Both in local area as well as wide routing network. Local areas include personal area network, home network, sensor network and WLAN. In larger case, PARO supplies wide area routing along with local energy conserving routes. Related work presents the model of PARO, the detail design of core algorithm which includes the over healing of redirecting, routine and mechanisms of route are presented in proposed work^{2,3,4}. Power control influences in two ways the performance of the physical layer. Primarily, power control impacts the traffic moving ability of the network. On the other hand, preferring

to a high transmission power decreases the number of forwarding nodes needed to arrive at the intended target, but as talk about above, this generates extreme intrusion in a medium that is commonly public. In disparity, preferring a lower transmission power decreases the intrusion seen by potential transmitters, but packets need more forwarding nodes to arrive at their intended target. In^{1,5,6,7} the authors illustrate that, when allowing for the physical layer merely, dropping the transmission power is an improved approach since this boosts the traffic carrying ability of the network. Secondly, power control influences the connectivity of the resultant network.

By an associated network, we signify a network in which any node has a possible route of substantial links (or forwarding nodes) to arrive at any planned recipient node. A high transmission power boosts the connectivity of the network by raising the number of direct links seen by every node, but this is at the cost of dropping network capability^{2,3,8} topology management by the usage of coverage area of each node and power management based on mean transmission power within the context of wireless ad-hoc networks. By reducing the transmission range of the nodes, energy consumed by each node is decreased and topology is formed. A new algorithm is formulated that helps in reducing the system power consumption and prolonging the battery life of mobile nodes. Formation of cluster and selection of optimal cluster head and thus forming the optimal cluster taking weighted metrics like battery life, distance, position and mobility is done based on the factors such as node density, coverage area, contention index, required and current node degree of the nodes in the clusters^{1,8}.

2. Proposed Method

Topology formation and neighbor discovery

The original stage of the tactic used here defines that each sensor would transmit their “Hello” packets to adjacent nodes, to confirm that each neighborhood nodes are in its communication range. Thus it can simply calculate its neighborhood nodes centered on the signal of beacon, and the neighboring node information gathered from its modified transmission range procedure. This process was done by the protocol of modified neighbor discovery. In this work, a fresh method for MND protocol named SECURE FRIEND is offered. As it is known Secure FRIEND from this protocol that each adjacent node will recognize its neighborhood nodes. This information of

neighbor node wants to broadcast in routing procedure. This is done through the protocol of ND. Though ND protocol starts pre-handshaking which is happening to evade the shortcoming of birthday protocols. It can save the probabilities of collisions and idle slots additionally. For a communicating node, it will verify the broadcasting and save idle and attend the state. The new MND protocol termed SECURE FRIEND in which the pre-handshaking actions are injected afore each usual slot^{1,5,7,8}. By this SECURE FRIEND protocol, evade the vigorous disadvantage of traditional birthday protocols is done and this decrease the probabilities of crashes and the slots of idle. When we communicating a node, in TR, the node will direct its detection note and save attending in FB for acquiring reaction. Though for the reception node, the node will preserve attending in TR to control whether to direct the indication of feedback for informing the communicating nodes of disappointment in communication. Afterwards TR, nodes attain the sub slot of FB, and the communicating node will be conscious of whether its communication is positive. In this outline, the communicate power of a user is supposed to be static and independent of the waveform adaptation process^{6,9}.

Algorithm 1 SECURE FRIEND-GR (Pre handshaking)

- 1.If Node(i) = 1 then Node (a) has successfully sent Message.
- 2.Node(a) will keep silent in Transit and exit.
- 3.end if
- 4.Node(a) decides to send Message by probability $1/\text{Node}(i)$ and keep listening by probability $1 - 1/\text{Node}(i)$.
- 5.if Node sends Messages then Node (a), it checks hopes to send delivery Message in Transit.
- 6.if Node(a) does not receive Message during given ratio then
- 7.Node (a) will transmit delivered message in Transmit;
- 8.else Node (a) receives sending message from other nodes.
- 9.A will transmit delivery message in transit by probability $1/2$.
- 10.end if
- 11.else Node does not send messages.
- 12.if nodes does not receive message during given ratio then
- 13.Node (a) will transmit delivery message in Transmit by probability $1/\text{Node}(n)$;

- 14.else Node (a) receives message from other nodes.
- 15.Node (a) will keep silent in Transmit.
- 16.end if
- 17.end if

Adaptive Node Position Update

Once node formation process is completed with the help of Friend handshaking protocol by applying the extended position of adaptive node update, during the node updates in geographic routing, during the frequency of node position updates there might be chance for node link failure during multiple times in the single tree structure itself. In order to endeavor and locate their positions more frequently following the previous procedure warding the paths, modernize their preview state position and present state positions. The current proposed scheme diminishes the traditional beaconing by adapting the dissimilarities. By comparing the node distance greater than acceptable threshold brings up to date their location to its neighbor all the way through beacon packets. During such thing has been measure the resilience metric to find the what extend the path protects a multiple cast tree to specific protection against single link failure propose method to strengthen the fast reroute for repair the current consistency nodes. To initiate the update procedure of the beacon, we include twofold rules. The first one is based on MP which is used to guess the modest mobility guess approach when the data of the location has been broadcasted, where as the traditional scheme imprecise. If the expected issue in the current localization values is better than a definite model, only the subsequent beacon is broadcast^{3,8}. Enumerating the overhead and topology correctness is done. The dual metrics of unknown nearest neighbor ratio and false neighbor ratio are evaluated using the local topology correctness. The earlier procedures of the proportion of fresh adjacent node are that the frontward node is uninformed on the other hand which is in point of fact surrounded by the head node which has range of the radio^{10,11,12}. On the converse, the latter represents the percentage of outdated neighbors who are in the list of adjacent node; on the other hand we have now progressed out of the Transmission, node's radio range, authentication of acknowledgement and path^{13,14}.

Resilience Metrics Measurements

Resilience $R(X, Y)$ of a tree confined by a backing path sandwiched between nodes X and Y:

$$R(X, Y) = R_t - R_d(X, Y)$$

$$R_t = \sum (fk.tdropk)$$

$R_d = \sum (fk.tdropk)$; where k belong to tree as well as k is not belongs to primary path of X, Y

RT: number of receivers released on a link failure (no backup path)

Rd (X, Y): number of receivers goes down on a link disappointment if a backup path is set between X and Y

R(X, Y): Numbers of receivers not go down on a solitary link failure if a backup path is set between X and Y

Large resilience $R(X, Y) \hat{U}$ more hosts are in the rearrange multicast tree on a solitary link failure.

Assumptions

Calculating R_d for all recognized pair's nodes

1. It can be established that one node of the pair that make the most of the resilience is a leaf
2. R_d could be calculated in time $\log(n)$ with n =amount of nodes in tree
3. Select pair of nodes that reduce R_d
4. Calculate the shortest path among the two nodes and Network must be clever to grip the influence of link and coverage disappointment
5. Altogether nodes are conscious of their individual location then velocity,
6. Bidirectional links,

Figure 1 describe about the fixed transmission range, here we have take three nodes, each node have connected in fixed transmission range in mobile ad-hoc network. By this technique power transmission range has been decrease.

Node Position update

Time Complexity: Find the time complexity occurred in the node location modernizes, Confirmation of Transmission, acknowledgement and path.

$$O(nn \log(nn) + (NW - nn) \log(NW - nn)) = O(nn \log(NW))$$

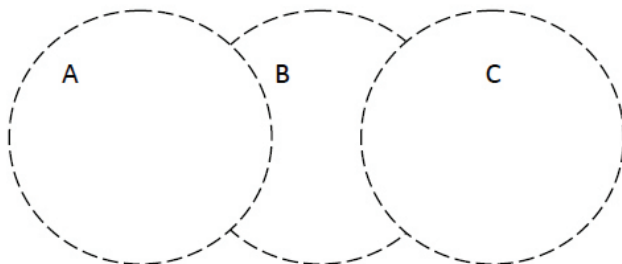


Figure 1. Fixed Transmission range

After the equation we detected that no of nodes comprises in the tree and network

- nn = amount of nodes comprises in the tree
- NW = amount of nodes covers in the system

These are the lower procedure to reach the link failure and node location updates, which we track to method in the node.

1. Discovery of the Link failure

Practice probes technique to spot and also finding numerous lost probes $\hat{U}$ failure

2. Link failure notification

Propagate announcement messages on the tree

3. Switchover

Traffic flows on the backup path and the tree is patch up, no node is go down

4. Link recovery detection

Faster than link malfunction discovery

5. Link recovery notification

Same as link malfunction warning

6. Switchback

Same topology as before the failure occurred.

3. Performance Evaluation

The performance parameters used for the simulation are as follow: Packet delivery ratio, Average throughput, Routing overhead and Average Delay.

Packet Delivery Ratio: It is defined as the ratio of number packets received by the destination to the number of packets originated by the source. For better performance of a routing protocol, it should be better¹¹.

Average Throughput: It is defined as the total amount of data a receiver receive from the sender divided by the time it takes for the receiver to get the last packet¹².

Routing Overhead: It is the total number of routing packets transmitted over the network, expressed in bits per second or packets per second.

Routing overhead = total no. of packets transmitted over network / packets per sec

Average Delay: A specific packet is transmitting from source to destination and calculates the difference between time of sending and the time of receiving. Delays due to route discovery, propagation or transfer time are included in the delay metric. Delay can be defined as:

Packet Delay = Packet receives time – packet sends time

For improved accepting, we initially describe three radio ranges associated to a wireless radio, specifically Transmission Range (Rtx), Carrier Sensing Range (Rcs) and Interference Range (Ri).

- Transmission Range (Rtx) signifies the assortment inside which a packet is effectively acknowledged if there is no intrusion from other radios. The communication range is primarily determined by communication control and radio dissemination properties (i.e., attenuation).
- Carrier Sensing Range (Rcs) is the choice inside which a transmitter activates carrier sense recognition. This is regularly dogged by the antenna compassion. In IEEE 802.11 MAC, a transmitter simply begins a communication when it minds the media free.
- Interference Range (Ri) is the choice inside which places in take delivery of mode will be get in the way with by an not related transmitter and therefore undergo a defeat

For each simulation Nconn is static = 10, Well Performing node has advanced throughput than selfish. Throughput alteration decreases through growth in rate of data. Figure 2 describe the packet analysis of our proposed system with existing system. We have compared the success packet delivery ratio from existing system to proposed system. From the graph one can observe that proposed system has 0.98 as successful delivery rate with respect to pause time, while the existing system has 0.7 as delivery rate from the result we observe that proposed sys-

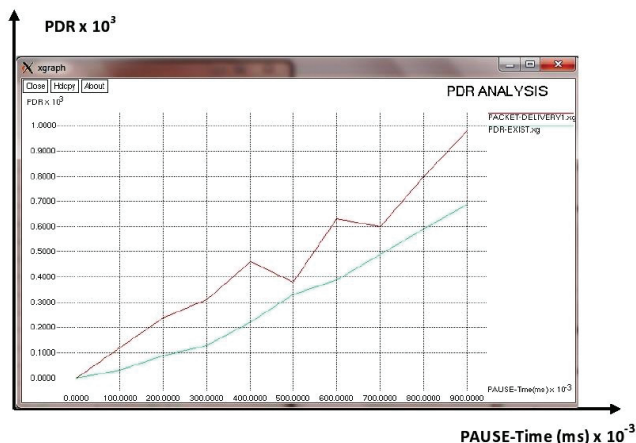


Figure 2. Successful packet delivery of our proposed system with existing system

tem has high delivery rate. Figure 3 show delay analysis of proposed system with existing system. Which is describe the delay between end to end of proposed system with existing system, from the graph it can be observed that proposed system has 2 ms as delay time with respect to pause time, while the existing system has 6.0 ms as delay rate from the result we observe that proposed system has low delay time. Figure 4 said the drop packet analysis of proposed system with existing system, which is describes the drop rate of our proposed system with existing system, from the graph we observe that proposed system has 6 packet drops with respect to pause time, while the existing system has 30 as drop rate from the result we observe that proposed system has low drop rate. Figure 5 describe the

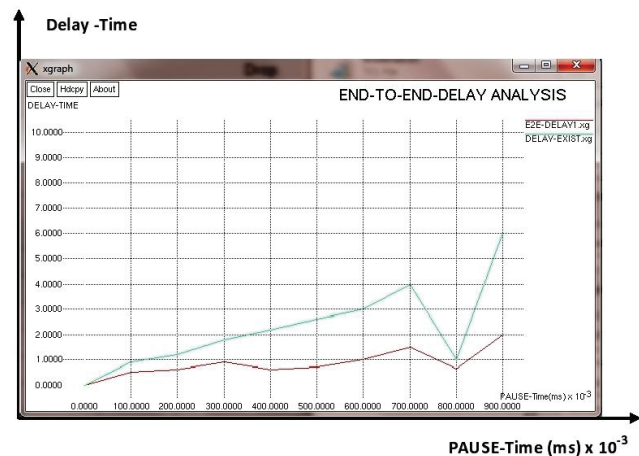


Figure 3. Delay between end to end of our proposed system with existing system

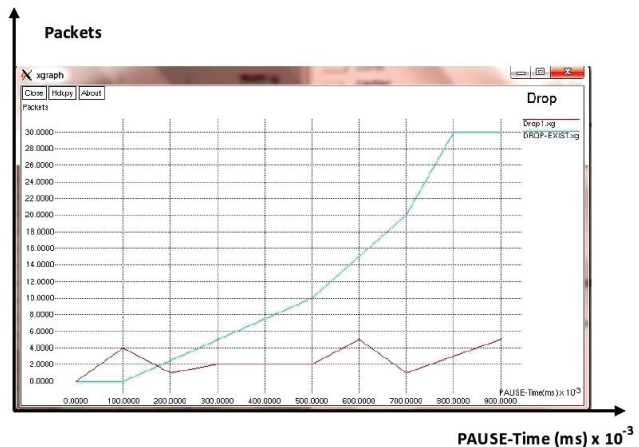


Figure 4. Drop rate of our proposed system with existing system

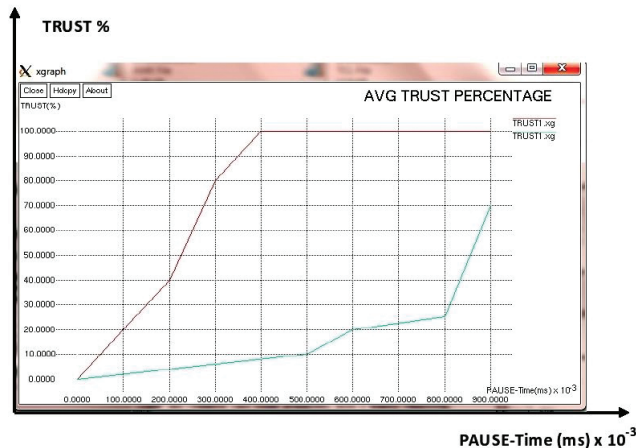


Figure 5. Average trust percentage rate of our proposed system with existing system

average trust percentage of proposed system with existing system. The above graph explains the trust percentage of our proposed system with existing system, from the graph we observe that proposed system has 100 as trust percentage with respect to pause time; while the existing system has 70.0 as trust percentage from the result we observe that proposed system has high trust percentage.

4. Conclusion

We have considered the problem of transmission range adjustment in a multi-hop wireless network context. An optimized technique devoted to the adaptation of the transmission radius based on nodes local densities and the distance to the destination was proposed. The proposed scheme is ratio of implicated nodes, power transmission gain and probability of transmission success. We have also evaluated our approach in the case of a uniform node distribution and findings confirm the previous results. As a major contribution as well, we have derived an analytical model that provides an estimation of the transmission area.

5. Acknowledgement

Authors deliver their graduate to SERB (Young Scientist Scheme, No. SP/FTP/ETA-51/2013) Govt. of India for Financial Assistance and FIST F.NO:SR/FST/College-189/2013

6. References

1. Rengarajan A, Rajasekaran S, Kumaran P, "An Efficient Lightweight Proactive Source Routing Protocol for handling overhead, packet delivery, throughput in MANETS", International Conference on 30th & 31st, 2015, pp. 46–57.
2. Li J, Blake C, Couto D, Lee H, Morris R, "Capacity of ad hoc wireless networks," Proceeding of 7th Annual International Conference on Mobile Computing and Networking, MobiCom'01, 2001, pp. 61–69.
3. Thangaraj S J J, Dr. Rengarajan A, Rajasekaran S, "Efficient Packet Delivery Approach for QoS Based Multipath Routing Protocol in MANETS", National Conference on 23rd Sept, 2015, pp. 49–57.
4. Tobagi F, Kleinrock L, "Packet switching in radio channels: Part II - the hidden terminal problem in carrier sensing multiple access and busy tone solution," IEEE Transaction on Communication, 1975, 23(12), pp. 1417–33.
5. IEEE-802.11, "Wireless LAN media access control (MAC) and physical layer (PHY) specifications", 2000, pp. 61–82.
6. Monks J P, Ebert J P, Wolisz A, Hwu W M W, "A study of the energy saving and capacity improvement potential of power control in multi-hop wireless networks," Proceedings of 26th Annual IEEE Conference on Local Computer Networks, Proceedings, Tampa, FL, 2001, pp. 550–59.
7. Wu C, Li V, "Receiver-initiated busy-tone multiple accesses in packet radio networks", ACM SIGCOMM87 Workshop: Frontiers in Computer Communications Review, 1987, 17(5), pp. 336–42.
8. Xu S, Saadawi T, "Does the IEEE 802.11 MAC protocol work well in Multihop wireless ad hoc networks?", IEEE Communications Magazine, 2001 39(6), pp. 130–37.
9. Rappaport T, Wireless Communications: Principles and Practice. Prentice Hall: New Jersey, 1996, pp. 1–7.
10. Hardware specifications of lucent ORiNOCO wireless PC card, https://www.mikrotik.com/documentation/manual_2.3/Wavelan/gsg_pc.pdf.
11. Xu K, Gerla M, "Effectiveness of RTS/CTS Handshake in IEEE 802.11 based Ad-hoc Networks," Ad Hoc Networks, 2003, 1(1), pp. 72–76.
12. Zeng X, Bagrodia R, Gerla M, "GloMoSim: a library for parallel simulation of large-scale wireless networks," Proceedings of PADS'98. 1998, May 26–29, pp. 154–61.
13. Takai M, Martin J, Bagrodia R, "Effects of wireless physical layer modeling in mobile ad hoc networks," Proceedings of ACM MobiHoc'01, 2001 pp. 87–94.
14. Jagadeesan D, Narayanan S, Asha G, "Efficient Load Sharing using Multipath Channel Awareness Routing in Mobile Ad hoc Networks", Indian Journal of Science and Technology, 2015, 8(15), pp. 1–5.