

Foam Modeling Approaches in Enhanced Oil Recovery: A Review

Hamed Hematpour*, Syed Mohammad Mahmood, Saeed akbari and Abdolmohsen Shabib Asl

Petroleum Engineering Department, Universiti Teknologi Petronas, Malaysia;
Hamed.heamtpoor@gmail.com, mohammad.mahmood@petronas.com.my,
akbari.s2007@gmail.com, msn.shabib@gmail.com

Abstract

Background/Objectives: Nowadays, gas injection is one of a convenient method to increase oil recovery. The drawbacks of gas injection have been solved, to some extent, via introducing the foam assisted process. In order to accomplish an advantageous foam flooding a suitable model for foam is required to be able to predict the foam behavior appropriately. **Analysis:** This paper describes the basic concept of foam as well as different foam model approaches for foam assisted process in Enhanced Oil Recovery. In addition, pros and cons of each approach has been tabulated and discussed. **Finding:** We able to provide the advantages and disadvantages of each modeling approach as well as those parameters which have a significant effect on each model. The result depicted that, the best way to simulate the foam flooding in the commercial simulator is the Empirical approach. However, this model is not able to predict the behavior of foam in unsteady state properly. **Novelty:** The lack of a brief and informative study about basic of foam modeling approaches is the motivation of this study. Accordingly, this study presents the general overview in foam models which has been developed in the past three decades.

Keywords: Empirical Approach, Foam Flooding, Foam Modeling, Gas Mobility Reduction, Mechanistic Approach

1. Introduction

Foam is defined as dispersed gas phase in liquid phase¹. The concept of foam assisted process has been introduced at 1958 for the first time². At that time, only the application of foam in gas drive mechanism has been investigated. The main phenomena which has been focused for foam flooding was mobility control of gas injection process. In despite of introducing other applications for foam in oil industry such as matrix acidizing treatment³⁻⁵, contaminated aquifer remediation^{6,7} and gas blockage^{8,9}, still the prominent implementation of foam is Enhanced Oil Recovery. The injection of a material that is not initially existed in the reservoir to increase the oil recovery is called Enhanced Oil Recovery (EOR)¹⁰. The gas injection process is one of the common method to increase oil recovery especially in carbonate reservoir

however the low sweep efficiency due to high mobility as well low density of gas phase is considered as drawback of gas injection. In order to overcome this draw of gas injection several methods has been introduced such as Water Alternating Gas (WAG), Simultaneous Water And Gas injection (SWAG)^{11,12}. Although these mechanisms shows the better performance compare to gas injection due to mobility control, foam assisted process leads to higher recovery compare to these methods¹³.

Foam assisted processes are implemented in four different ways: (1) pre-generated foam injection which foam is generated on the surface and then inject into the reservoir. (2) Surfactant Alternating Gas (SAG) which the surfactant solution slug follows by gas slug and when gas meet the surfactant phase the foam will be generated inside the reservoir¹⁴. (3) According to recently studies¹⁵, some surfactant can be dissolved in

*Author for correspondence

supercritical CO₂, therefore injecting this solution under the special circumstances leads to foam generation inside the reservoir. (4) Both gas phase and surfactant solution can be injected simultaneously but in different layers to generate the foam through the reservoir¹⁶.

2. Basics of Foam

Foam is not thermodynamically stable therefore; it is not considered as one phase. The thin liquid layer which separate the gas bubbles is called “lamella”¹⁷. The force which is required to sustain the lamella is called “disjoining pressure”. The disjoining pressure is the combination of three forces: van der Waals force, adsorption and protrusion and/or hydration forces. The number of lamella per unit area is known as “foam texture” and is shown by “ f_g ”. Although this parameter plays the main role in foam characterization, there is no direct method to measure foam texture inside porous media during the displacement process. Therefore, the pressure gradient is utilized to characterize the foam in porous media. Generally, the foams are categorized in two groups: weak foam and strong foam. In weak foam the foam texture is low, in other word, the weak foam has coarse texture and leads to low pressure gradient. On the other hand, the strong

has high foam texture i.e. it has fine texture and leads to high pressure gradient. Figure 1 illustrates types of foams.

The “foam quality” is defined as the ratio of gas volume over total volume which normally is shown by “ ϕ ”. This parameter also is an indicator to characterize the foam, the high foam quality and low foam quality. The foam quality corresponding to maximum value of pressure gradient is called “transition foam quality” (f_g) which is depend on surfactant type, surfactant concentration, rock type and permeability.

The mechanisms of foam generation are categorized in three; first, leave behind, in which lamella deserted behind during the invasion of gas into surfactant solution i.e. drainage process, second, snapped-off, in which the driving force of gas on interface of gas-liquid leads to bubble generation, also the capillary fluctuation cause the bubble generation, third, lamella division, in which the preexisting bubbles are divided into many at pore


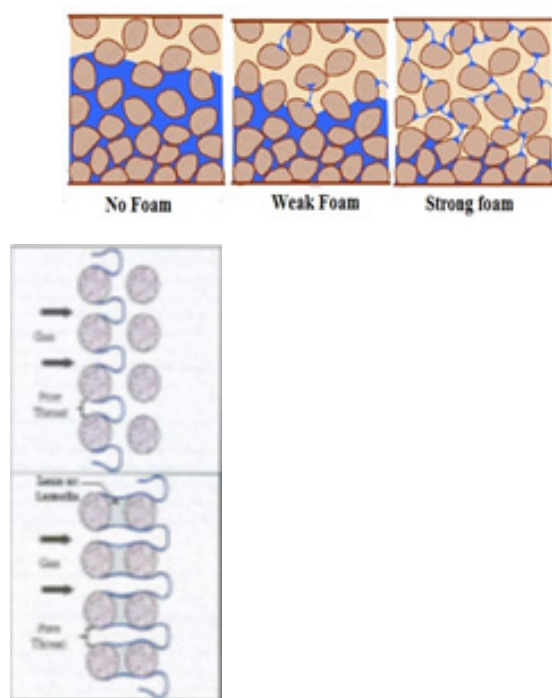


Figure 1. Types of foam textures¹⁸.

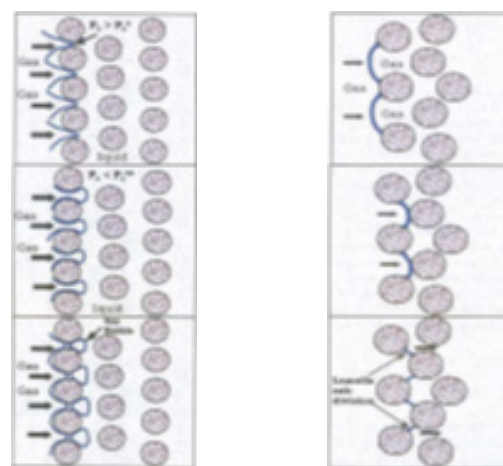

1.1.1.1 Leave behind 1.1.1.2 Snapped-off 1.1.1.3 Lamella Division

Figure 2. Mechanisms of foam generation¹⁴.

junction due to pressure gradient¹⁸. These three different mechanisms are shown in Figure 2.

As mentioned before foam is not thermodynamically stable, hence the lamella is unstable. The lamella coalescence leads to destruction of the foam. This coalescence of lamella is the consequence of changing the surface free energy by alternating interfacial area between immiscible phases¹⁹. As it was mentioned before disjoining pressure

sustain the lamella and whenever this pressure reach to maximum value the lamella will ruin. This maximum value for disjoining pressure is related to a capillary pressure which is called "limiting capillary pressure" (p_c^*).

3. Foam Modeling through Porous Media

In order to model the foam through porous media many different models have been developed during past three decades. Generally, three different modeling approaches have been describe in literature: Empirical models, Semi-empirical models and Mechanistic models¹⁸. In another categorization, modeling approaches have been divided in two main groups: Local equilibrium models and Population balance models²⁰. The main aim of all models is to reduce gas mobility in presence of foam. Therefore, all models focus on reduction of gas mobility whether by modifying the relative permeability of gas or gas viscosity or both. In all models the relative permeability of water phase was considered as constant. In other word, the water permeability does not changed in the presence of foam^{21,22}. Furthermore, the proper foam model should be able to model the gas mobility reduction, the non-Newtonian behavior of foam, changing the foam behavior by surfactant concentration changing and surfactant flow (adsorption phenomena)²³. The last part of foam model, the surfactant flow needs additional material balance and diffusivity equation²⁴, hence, it is out of the scope of this study. In the following sections the different foam model approaches has been explained in details. In this study, the first categorization has been followed.

3.1 Emprical Approach

This kind of approach was developed only based on reduction factor of mobility of gas phase. These models do not directly include the foam texture in the calculation, only based on observed data and effective parameters were developed. All of these models have been developed based on the local equilibrium's concept for foam, i.e. the number of generated foam is equal to the number of destructed foam since there are two factors which can modify the mobility (relative permeability and viscosity of foam phase), two different types of empirical model have been developed: relative permeability modifier, viscosity modifier. The first model for viscosity modifier

utilizes the gas velocity, water saturation and surfactant concentration to modify the viscosity of gas in the presence of foam²⁵:

$$\mu_g^f = \mu_g [1 + RC_s(S_w - S_{wc})f(u_g)] \quad (1)$$

where, is constant and normally considered as 0.01. This model was modified by²⁶ and the new function for surfactant concentration, pressure gradient and oil saturation have been included in this model.

$$\mu_g^f = \frac{\mu_g [1 + Df_c(C_s)(S_w - S_{wc})f_k(k) + f_p(\nabla p)]}{1 + ES_o^2} \quad (2)$$

The first model which considered the modification on both relative permeability and viscosity was developed by Chang and co-workers²⁷. In this model the total mobility has been modified in the presence of foam, this model includes interstitial gas velocity (), fractional flow of gas (), surfactant concentration () and phase saturations (oil and water).

$$\frac{k_{rg}^f}{\mu_g} = (k_1 f_g + k_2 u_g^n) [1 + k_3 C_s (S_w - S_{wr})] [1 + k_4 (S_o - S_{or})] \quad (3)$$

where, K values are fitting parameters and should be determined using experimental data.

Many empirical models have been developed to modify the relative permeability of gas in presence of foam. However, the common models have been reviewed in this study²⁸, for the first time introduced the new model to only reduce the gas relative permeability which includes the surfactant concentration and pressure gradient as shown in Equation 4.

$$\begin{cases} FM = [1 + \frac{\nabla p_{foam}}{\nabla p_{nofoam}} (\frac{C_s}{C_s^{max}})^{\epsilon_s}]^{-1} \\ k_{rg}^f = k_{rg} \times FM \end{cases} \quad (4)$$

This model has been utilized in reservoir simulator (STARS) at that time. This model has been modified and improved and utilized in different reservoir simulators:

$$\begin{cases} FM = [1 + f_{mmob} \cdot f_w \cdot f_s \cdot f_o \cdot f_c \cdot f_{salinity}]^{-1} \\ k_{rg}^f = k_{rg} \times FM \end{cases} \quad (5)$$

This model includes the pressure gradient function (f_{mmob}), dry out function (f_w), surfactant concentration

function (f_s), oil saturation function (f_o), capillary number function (f_c) and salinity function (f_{salinity})²⁹. Therefore, to employ these model there are many parameters to be determined, consequently, required many experiments to be conducted. These models are not able to predict unsteady state foam data especially for surfactant alternating gas which is unsteady. The reason is that these models have been developed biased on the local equilibrium concept.

3.2 Semi-empirical Approach

This model's approach also follows the local equilibrium concept for foam same as empirical approach. These models consider the bubble generation and destruction, however put them equal due to local equilibrium concept. One of the well-known models has been developed³⁰ and modified by others^{14,31} to reach the following equation:

$$\left\{ \begin{array}{l} r_g = C_g S_w (\nabla P)^a \\ r_c = C_c n_f \left(\frac{1}{S_w + S_w^*} \right)^b \\ n_f = \left(\frac{C_g}{C_c} \right) (S_w - S_w^*)^b S_w (\nabla P)^a \\ q_f = \frac{k k_{rf}^0 \nabla P}{\mu_f} \\ \mu_f = \mu_g + \frac{C_f n_f}{1/\alpha} \end{array} \right. \quad (6)$$

In this model the rate of bubble generation (r_g) was put equal to bubble destruction rate (r_c) so the foam texture (n_f) can be calculated. In this model are model parameters which should be determined by conducting experiments. Moreover, the concept of critical water saturation (S_w^*), water saturation, below that the foam will be collapsed, has been employed in this model. Substituting the in viscosity formula gives foam viscosity, eventually, by performing the try and error procedure and substituting the foam viscosity in Darcy equation the flow rate of foam can be calculated. This model only modified the viscosity. Although these models appropriately fit to steady state foam data, they are weak in fitting the unsteady state behavior of foam flooding.

3.3 Mechanistic Approach

The models which have been developed based on mechanistic approach relied on the foam flow in physical point of view, also they include the foam texture. This approach

was categorized in three sub groups' approaches; the first one is population balance approach, second is an approach based on catastrophic theory and third is the percolation approach.

3.3.1 Population Balance Approach

This model considers the bubble as a phase for transporting through the porous media, hence it includes the conservation equation, which has been written for foam bubble. The foam texture (n_f) is appropriate index for foam bubble, therefore it has been utilized to write the conservation equations and after that to modify the relative permeability of the gas. In³² developed the first model based on this approach, after that many studies have been conducted on this approach, however, in the most recently studies^{33, 34}, the below conservation equation was followed:

$$\left\{ \begin{array}{l} \frac{\partial}{\partial x} [\phi (S_{gf} n_f + S_{gt} n_t)] + \nabla \cdot (u_g n_f) = \phi S_g (R_g - R_c) + Q_s \\ S_g = S_{gt} + S_{gf} = X_t S_g + X_f S_g \end{array} \right. \quad (7)$$

In this model the gas saturation (S_g) is divided to two part; trapped gas due to foam (S_{gt}) and flowing gas saturation (S_{gf}). Also, the foam texture for flowing foam (n_f) and trapped foam (n_t) has been considered in this model. The rate of foam generation and foam destruction shows by R_g and R_c , respectively.

In order to drive foam generation and destruction rate several models have been developed^{23,33-37}. The model which was developed, was shown in the following equation³⁷;

$$\left\{ \begin{array}{l} R_g = k_1 u_g^m \\ R_c = k_{-1} u_g^n n_f \end{array} \right. \quad (8)$$

where, k_1 and k_{-1} are constant coefficient and m and n are fitting parameters of model. Also the relative permeability and viscosity of foam are calculated from equation 9.

$$\left\{ \begin{array}{l} k_{rg}^f = k_{rg}^0 \left(\frac{X_f S_g}{1 - S_{wc}} \right)^g \\ \mu_g^f = \mu_g + \frac{\alpha n_f}{u_g^c} \end{array} \right. \quad (9)$$

These kinds of models also called full-physic version of mechanistic models. These models are able to predict the unsteady state foam as well as steady state foam behavior. The difficulty in finding models parameters are disadvantages of these models. Moreover, these models need more

calculation in their application because the conservation equation for foam texture also should be solved.

3.3.2 Catastrophic Theory Approach

Several studies have been conducted on foam's rheology in porous media^{14,38,39} which is often referred to as surfactant-alternating-gas (SAG). All these studies have revealed that there is a suddenly change in foam's behavior in the certain water saturation. This dramatically change phenomena is called "catastrophic phenomena", this leads to mathematical singularity in the foam behavior. Some mechanistic approaches have considered this phenomena in their foam destruction rate models, the recently model which has been developed, was shown as following equation¹⁴.

$$\begin{cases} R_g = \frac{c_g}{2} \left[\operatorname{erf} \left(\frac{p - p_g}{\sqrt{2}} \right) - \operatorname{erf} \left(\frac{-p - p_g}{\sqrt{2}} \right) \right] \\ \begin{cases} R_c = C_c n_f \left(\frac{1}{S_w - S_w^*} \right)^n \text{ if } S_w < S_w^* \\ R_c = C_c n_f \left(\frac{S_w}{S_w - S_w^*} \right)^n \text{ if } S_w > S_w^* \end{cases} \end{cases} \quad (10)$$

In this model the critical capillary pressure was considered in the form of corresponding critical water saturation which below that foam will be destructed. These types of models same as rest mechanistic models need many calculations hence they are time consuming. Theme models can be an appropriate alternative for the empirical models which were developed based on fractional flow theory because these models are able to predict the behavior of foam in unsteady state condition and near the critical water saturation.

3.3.3 Percolation Approach

This approach also can be considered as a mechanistic approach because it focuses on physical modeling of fluid flow in porous media. In this approach, the porous media are considered as a bunch of capillary tubes as pore throat and pores. The percolation approach is utilized to simulate the foam process at the scale of the network of throats and pores in porous media due to its ability to quantify connection of volumes, areas or line segment⁴⁰. Therefore, the ability of this approach to quantify the heterogeneity of porous media is one of the advantages of this approach. This approach can be utilized for foam studies to recognize the spatial distribution's effect on foam generation and destruction. For instance, this approach was employed in the studies to find out there is the minimum value of pressure gradient to mobilize the foam lamella⁴¹. Moreover, some theoretical models have been developed on the role of formation permeability on foam mobility³⁵. Although some parameters which are difficult to be obtained in other mechanistic approaches can be derived by this approach⁴², the main drawback of using this approach for foam modeling is the large computational time and cost of this model⁴³.

4. Conclusion Recommendations for Future Research

In order to model foam flow through porous media, three different approaches exist; Empirical, Semi-empirical and Mechanistic. In the empirical approach to derive gas mobility, the foam texture hasn't directly affect it but

Table 1. Summary of approaches

| | Number of model parameters to be determined | Difficulty of method for determining model parameters | Accuracy to fit experimental data | Time consumption for simulation | Commercial simulator software |
|-------------------------|--|---|--|---------------------------------|-------------------------------|
| Empirical Approach | large number of model's parameter should be determined | easy | good fit for steady state experiment but weak for unsteady state | short time | widely used |
| Semi-Empirical Approach | large number of model's parameter should be determined | difficult | good fit for steady state experiment but weak for unsteady state | short time | not used |
| Mechanistic Approach | few number of model's parameter should be determined | difficult | good fit for both steady and unsteady state experiment | long time | rarely used |

the gas mobility can be a function of flow rate and surfactant concentration. In semi-empirical approach, the foam transport is expressed like mechanistic approach, however, to simplify this approach some assumptions are considered. The modeling of the fractional flow curve, in the presence of foam, is the goal of this approach. Mechanistic approaches can be complete in principle, but it may be difficult to obtain reliable parameters whereas empirical and semi-empirical approaches can be limited by the detail used to describe foam rheology and mobility. In the general point of view, the selection of foam model's approach depends on several factors. Since each approach has advantages and disadvantages, an appropriate approach could be chosen for foam process modeling. These features were summarized in Table 1.

As a recommendation for future study, a new model is required to be developed to combine the mechanistic and empirical approaches. This model should be able to fit both steady state and unsteady state foam flooding, using fewer model parameters. Moreover, this model should be able to illustrate the catastrophic phenomena in foam flooding, when the water saturation reach to the critical value.

5. Nomenclature

| | | | |
|-----------|--------------------------|------------|-----------------------------|
| μ_g^f | Foam viscosity | ∇p | Pressure gradient |
| μ_g | Gas viscosity | S_o^* | Critical water saturation |
| C_s | Surfactant concentration | S_o | Oil saturation |
| S_w | Water saturation | S_{or} | Residual oil saturation |
| S_{wc} | Initial water saturation | k_{rg}^f | Foam relative permeability |
| U_g | Gas velocity | k_{rg} | Gas relative permeability |
| f_g | Foam quality | P_c^* | Critical capillary pressure |

6. Acknowledgement

The authors are grateful to Petroleum department of Universiti Teknologi PETRONAS and PETRONAS Company for graduate assistantship support.

7. References

1. Hirasaki GJ. The steam-foam process--review of steam-foam process mechanisms. Society of Petroleum Engineers. 1989.
2. Boud DC, Holbrook OC. Gas drive oil recovery process [Internet]. [Cited 1958 Dec 30]. Available from: <http://www.google.com/patents/US2866507>.
3. Alvarez JM, Rivas H, Navarro G. An optimal foam quality for diversion in matrix-acidizing projects; 2000.
4. Li S, Li Z, Lin R. Mathematical models for foam-diverted acidizing and their applications. Petroleum Science. 2008; 5(2):145-52.
5. Rossen WR, Wang MW. Modeling foams for acid diversion. Society of Petroleum Engineers. 1999 Feb 4.
6. Hirasaki GJ, Miller CA, Szafranski R et al. Field demonstration of the surfactant/foam process for aquifer remediation. SPE Annual Technical Conference and Exhibition, San Antonio, Texas; 1997 Oct 5-8.
7. Mulligan CN. Current opinion in colloid & interface science recent advances in the environmental applications of biosurfactants. Current Opinion in Colloid & Interface Science. 2009; 14(5):372-78.
8. Bernard GG, Holm LW. Mode study of foam as a sealant for leaks in gas storage reservoirs. Society of Petroleum Engineers. 1970; 10(1):9-16.
9. Smith DH, Metc USDOE, Jikich SA, Wasc G. Foams and surfactants for improved underground storage of natural gas by blockage of water coning. Eastern Regional Conference & Exhibition Held in Pittsburgh. PA, U.S.A; 1993. p. 197-201.
10. Walsh M, Lake LW. A generalized approach to primary hydrocarbon recovery of petroleum exploration and production. 1st ed. Elsevier Science; 2003.
11. Sohrabi M, Henderson GD, Tehrani DH, Danesh A. Visualisation of oil recovery by Water Alternating Gas (WAG) Injection using high pressure micromodels - water-wet system. SPE Annual Technical Conference and Exhibition; 2000. p. 1-8.
12. Robie DR, Roedel JW, Wackowski RK. Field trial of simultaneous injection of CO₂ and water, Rangeiy ' Weber sand

- unit, Colorado. SPE Production Operations Symposium, Oklahoma City, Oklahoma; 1995 Apr 2–4.
13. Farzaneh SA, Sohrabi M. A review of the status of foam applications in enhanced oil recovery; 2013.
 14. Afsharpoor A, Lee GS, Kam SI. Mechanistic simulation of continuous gas injection period during Surfactant-Alternating-Gas (SAG) processes using foam catastrophe theory. *Chemical Engineering Science*. 2010; 65(11):3615–31.
 15. Le VQ, Nguyen QP, Sanders AW, Dow T. A novel foam concept with CO₂ dissolved surfactants. The SPE/DOE Improved Oil Recovery Symposium Held in Tulsa, Oklahoma; 2008 Apr. p. 1–15.
 16. Stone HL. A simultaneous water and gas flood design with extraordinary vertical gas sweep. *Proceedings of SPE International Petroleum Conference in Mexico*; 2004.
 17. Shabib-Asl A, Ayoub MA, Saaïd IM, Valentim PPJ. Experimental investigation into effects of crude oil acid and base number on wettability alteration by using different low salinity water in sandstone rock. *Journal of the Japan Petroleum Institute*. 2015; 58(4):228–36.
 18. Hematpur H, Karimi M, Rashidi M. A brief review on foam flow modeling through porous media. *International Journal of Petroleum and Geoscience Engineering*. 2014:104–19.
 19. Rossen WR. Foams in enhanced oil recovery. R.K. Prud'homme, Khan S, editor. *Foams: Theory, Measurements and Applications*. New York: Marcel Dekker; 1996.
 20. Ma K, Ren G, Mateen K, Morel D, Cordelier P. Literature review of modeling techniques for foam flow through porous media. The SPE Improved Oil Recovery Symposium Held in Tulsa, Oklahoma; 2014 Apr 12–16.
 21. George GB, Jacobs WL. Effect of foam on trapped gas saturation and on permeability of porous media to water. *Society of Petroleum Engineers*. 1965; 5(4):295–300.
 22. de Vries AS, Wit K. Rheology of gas/water foam in the quality range relevant to steam foam. *SPE Reservoir Evaluation & Engineering*. 1990 May:185–92.
 23. Kovscek AR. Reservoir simulation of foam displacement processes. *Earth Science*; 1998.
 24. Hematpour H, Arabjamloei R, Nematzadeh M, Esmaili H, Mardi M. An experimental investigation of surfactant flooding efficiency in low viscosity oil using a glass micro-model. *Energy Sources Part A Recovery Utilization and Environmental Effects*. 2012; 34(19):1745–58.
 25. Marfoe CH, Kazemi H, Ramirez WF. Numerical simulation of foam flow in porous media. SPE Annual Technical Conference and Exhibition, Dallas, Texas; 1987 Sep 27–30.
 26. Islam MR, Ali SMF. Numerical simulation of foam flow in porous media. Annual Technical Meeting, Calgary, Alberta; 1988 Jun 12–16.
 27. Chang S, Owusu L, French SB, Kovarik FS. The effect of microscopic heterogeneity on CO₂-foam mobility: part 2-mechanistic foam simulation. SPE/DOE Seventh Symposium on Enhanced Oil Recovery, Tulsa, Oklahoma; 1990 Apr 22–25.
 28. Ibrahim MNM, Koederitz LF. Two-phase steady-state and unsteady-state relative permeability prediction models. SPE Middle East Oil Show; 2013.
 29. Ltd. CMG. Stars User Guide Advanced Processes & Thermal Reservoir Simulator; 2014.
 30. Kam SI, Rossen WR. A model for foam generation in homogeneous media. *Society of Petroleum Engineers*. 2003; 8(04):417–25.
 31. Dholkawala ZF, Sarma HK, Kam SI. Application of fractional flow theory to foams in porous media. *Journal of Petroleum Science and Engineering*. 2007; 57(1–2):152–65.
 32. Falls AH, Hirasaki GJ, Patzek TW, Gauglitz DA, Miller DD, Ratulowski T. Development of a mechanistic foam simulator. *Society of Petroleum Engineers*. 1988.
 33. Roostapour A, Kam SI. Anomalous foam-fractional-flow solutions at high-injection foam quality. *SPE Reservoir Evaluation & Engineering*. 2013 Feb 16:14–18.
 34. Chen Q, Gerritsen MG, Kovscek AR. Modeling foam displacement with the local-equilibrium approximation: theory and experimental verification. *Society of Petroleum Engineers*. 2010; 15(1):171–83.
 35. Veeningen D, Zitha PLJ, Van Kruijsdijk CPJW. Understanding foam flow physics: the role of permeability. SPE European Formation Damage Conference, The Hague, Netherlands; 1997 Jun 2–3.
 36. Myers TJ, Radke CJ. Transient foam displacement in the presence of residual oil: experiment and simulation using a population-balance model. *Industrial & Engineering Chemistry Research*. 2000; 39(8):2725–41.
 37. Ettinger RA, Radke CJ. Influence of texture on steady foam flow in Berea sandstone. *SPE Reservoir Evaluation & Engineering*. 1992; 7(1):83–90.
 38. Gauglitz AP, Friedmann F, Kam SI, Rossen RW. Foam generation in homogeneous porous media. *Chemical Engineering Science*. 2002; 57(19):4037–52.
 39. Kam SI. Improved mechanistic foam simulation with foam catastrophe theory. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*. 2008; 318(1–3):62–77.

40. Hunt AG. Applications of percolation theory to porous media with distributed local conductances. *Advances in Water Resources*. 2001; 24(3–4):279–307.
41. Rossen WR, Gauglitz PA. Percolation theory of creation and mobilization of foams in porous media. *AIChE Journal*. 1990; 36(8):1176–88.
42. Kovscek AR, Bertin HJ. Foam mobility in heterogeneous porous media (II: Experimental observations). *Transport in Porous Media*. 2003 Jul; 52(1):37–49.
43. Nguyen QP, Alexandrov AV, Zitha PL, Currie PK, Technology DU. Experimental and modeling studies on foam in Porous media : a review. *SPE International Symposium on Formation Damage Control*, Lafayette, Louisiana; 2000 Feb 23–24.